


Single Phase Bridge (Power Modules), 25 A/35 A



D-34

FEATURES

- 3
- H
- C
- E
- N (P.)
- /A/C (AC305);
- 260, 275 C
- L E300359
- BH
- D



PRODUCT SUMMARY	
Io	25 A/35 A

DESCRIPTION

A

MAJOR RATINGS AND CHARACTERISTICS				
SYMBOL	CHARACTERISTICS	26MB-A	36MB-A	UNITS
Io		25	35	A
	-c	70	55	C
IF M	50 H/	400	475	A
	60 H/	420	500	
I ²	50 H/	790	1130	A ²
	60 H/	725	1030	
IRRM	R	1400, 1600	1400, 1600	
-J		- 55, 150	- 55, 150	C

ELECTRICAL SPECIFICATIONS






VOLTAGE RATINGS				
TYPE NUMBER	VOLTAGE CODE	V _{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V _{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I _{RRM} MAXIMUM AT T _J MAXIMUM mA
26MB..A	140	1400	1500	2
36MB..A	160	1600	1700	

MB High Voltage Series



H₁ P₁ P₁

P B₁
(P₁ M₁), 25 A/35 A

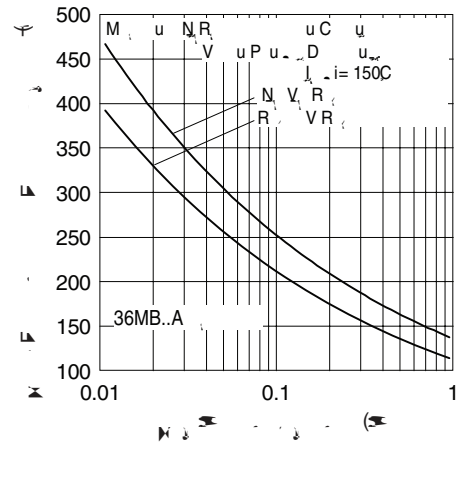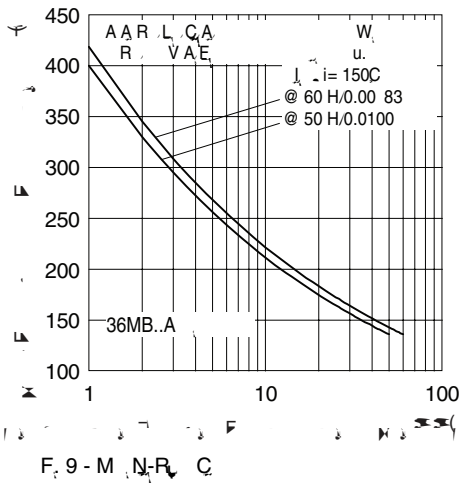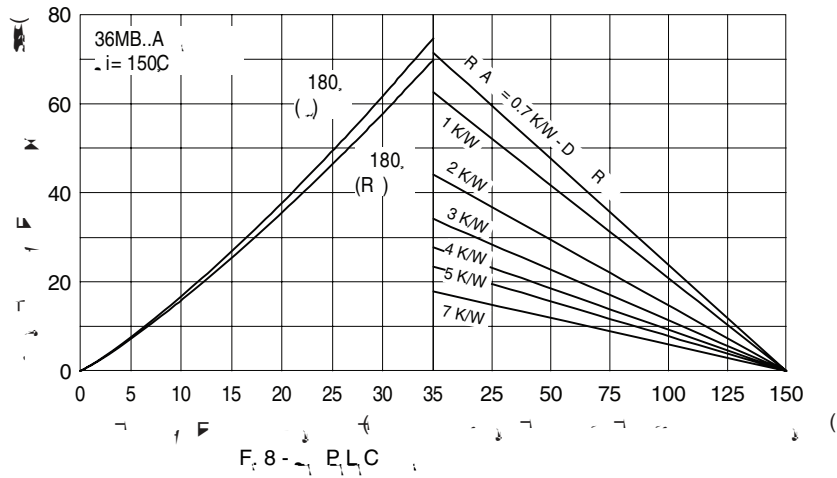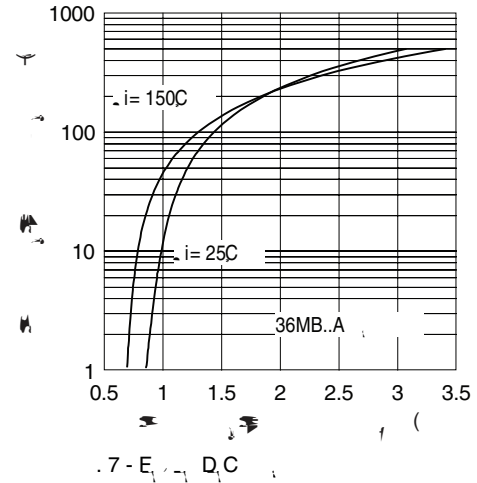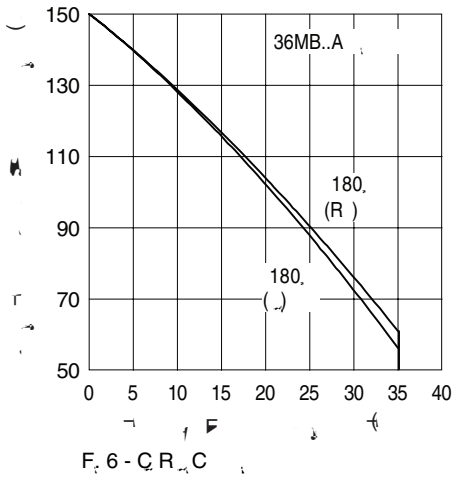



P B
(P.M), 25 A/35 A

H P P



