

# Charger Detection Device with High Speed USB Switch Battery Charger Specification v1.2

Check for Samples: [bq24392](#)

## FEATURES


- **Charger Detection Device**
  - USB BCv1.2 Compliant
  - VBUS Detection
  - Data Contact Detection
  - Primary & Secondary Detection
  - Dead Battery Provision (DBP) 32-min Timer
- **Switch**
  - USB 2.0 High Speed Switch
- **Compatible Accessories**
  - Dedicated Charging Port
  - Standard Charging Port
  - Charging Port
- **Other Chargers Detected**
  - Apple™ Charger
  - TomTom™ Charger
  - Non Compliant USB Charger

- **VBUS Voltage Range**
  - –2V to 28V Tolerance on VBUS
- **ESD Performance Tested per JESD 22**
  - 4000-V Human-Body Model (A114-B, Class II)
  - 1500-V Charged-Device Model (C101)
- **ESD Performance DP\_CON/DM\_CON to GND**
  - ±8kV Contact Discharge (IEC 61000-4-2)

## APPLICATIONS

- Cell Phones
- Smart-Phones
- Tablets
- Camera & GPS Systems

## TYPICAL APPLICATION DIAGRAM

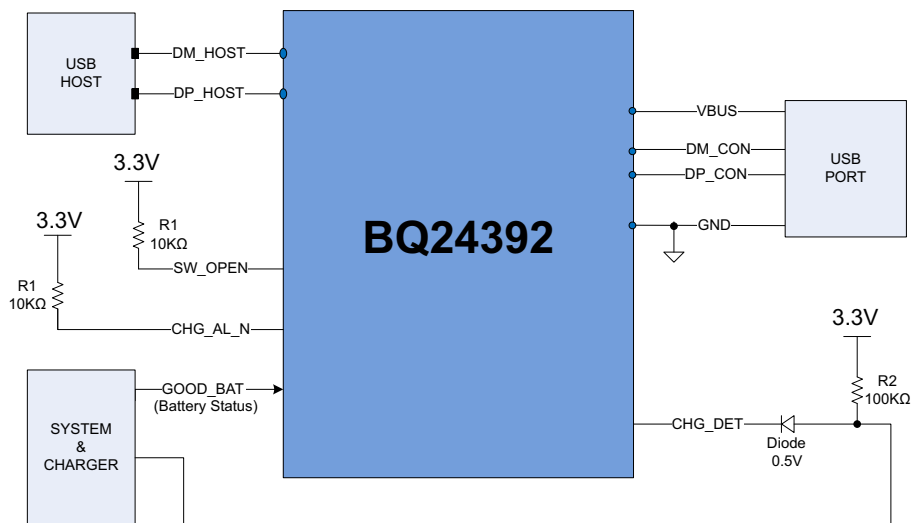

## ORDERING INFORMATION<sup>(1)</sup>

T <sub>A</sub>	PACKAGE <sup>(2)</sup>		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	μQFN 0.5-mm pitch – RSE	Tape and Reel	BQ24392RSER	APH

(1) For the most current package and ordering information, see the BQ24392 datasheet (SLIS146A) at [www.ti.com](#).




**DESCRIPTION**

The bq24392 is a charger detection device with an integrated isolation switch for use with a micro/mini USB port. The device is compliant with USB Battery Charging specification v1.2. This device allows cell phones and tablets to be charged from different adapters including USB BCv1.2 compliant and non-standard USB chargers. These non-standard chargers include Apple, TomTom, and non-compliant USB chargers. The bq24392 conforms to Dead Battery Provision (DBP) specified in BCv1.2. This includes a 32-min timer that cannot exceed 45 mins.

The bq24392 has a USB 2.0 switch that supports high speed. In addition to a USB connector and host pins, bq24392 has one input and three output pins. This results in a minimum software workload for the system to interact with the device.

V<sub>BUS</sub> has 28V tolerance to avoid external protection. Power for this device is supplied through VBUS when accessory is attached.

**BLOCK DIAGRAM**

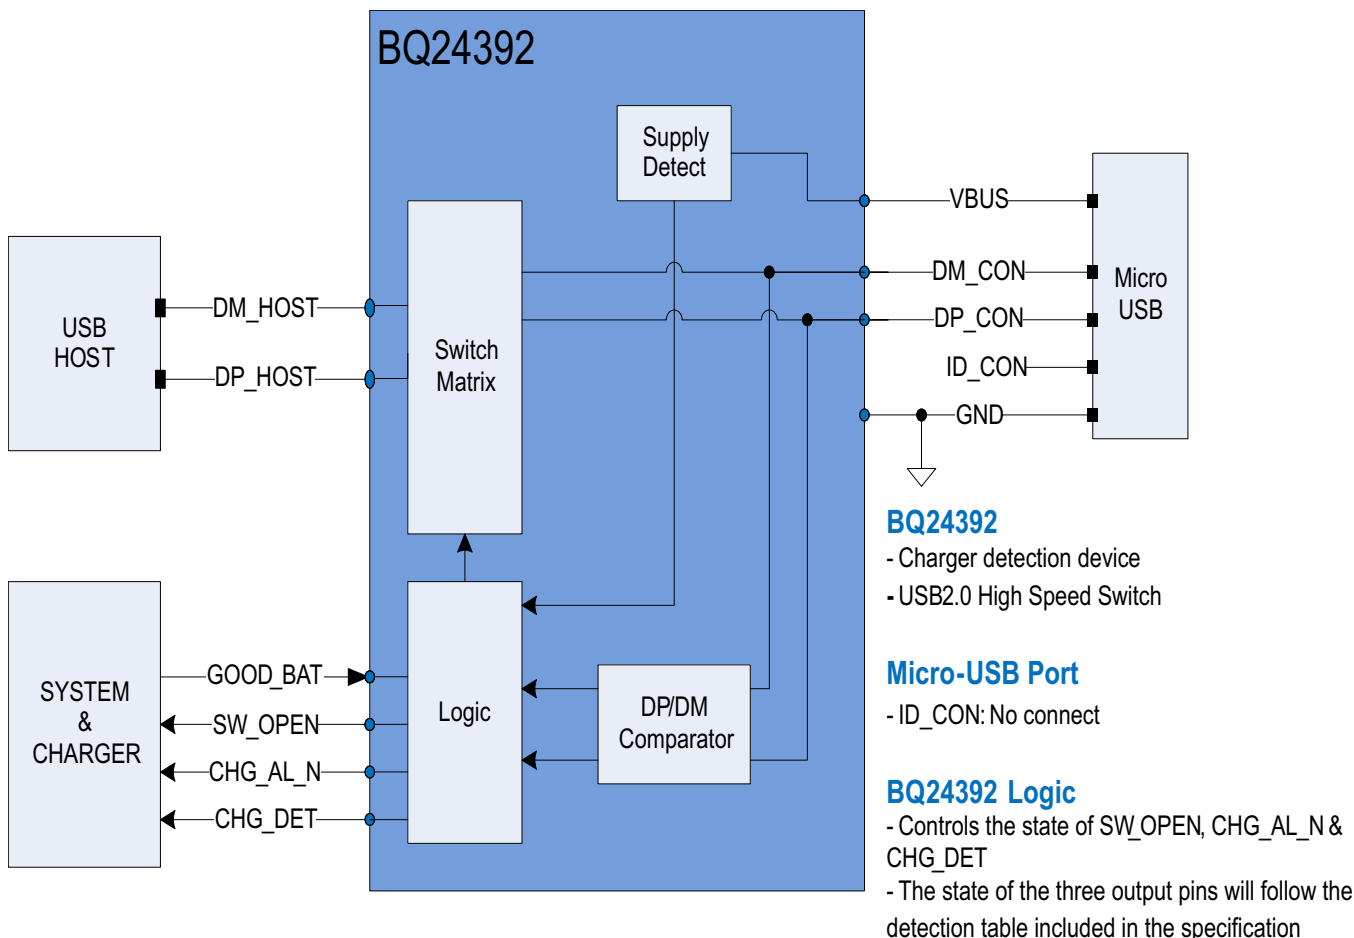



**SUMMARY OF TYPICAL CHARACTERISTICS**

<b>T<sub>A</sub> = 25°C</b>	<b>USB Path (DP_CON and DM_CON)</b>
ON-state resistance (r <sub>on</sub> )	8
ON-state resistance match ( r <sub>on</sub> )	0.5
ON-state resistance flatness (r <sub>on(flat)</sub> )	0.5
Bandwidth (BW)	920 MHz
OFF isolation (O <sub>ISO</sub> )	-26 dB at 250 MHz
Crosstalk (X <sub>TALK</sub> )	-32 dB at 250 MHz
Leakage current (I <sub>IO(ON)</sub> )	50 nA

**ABSOLUTE MAXIMUM RATINGS**

over -40 to 85 temperature range (unless otherwise noted)

		<b>ABSOLUTE MAX</b>	<b>UNIT</b>
Pin voltage range	VBUS	-2 to 28	V
	CHG_AL_N	-2 to 28	V
	All Others	-0.3 to 7	V
ESD	HBM	4000	V
	CDM	1500	V
	IEC Contact Discharge ( DP_CON, DM_CON to GND)	8000	V

**RECOMMENDED OPERATING CONDITIONS**

	<b>MIN</b>	<b>MAX</b>	<b>UNIT</b>
VBUS	4.75	5.25	V

--	--	--	--


**USB SWITCHING ELECTRICAL CHARACTERISTICS**

$V_{BUS} = 4.5V$  to  $5.5V$ ,  $T_A = -40^{\circ}C$  to  $85^{\circ}C$  (unless otherwise noted)<sup>(1)</sup>

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
VUSBIO	Analog signal range		0		3.6	V
$r_{ON}$	ON-state resistance	DM_CON, DP_CON, DM_HOST, DP_HOST $V_I = 0V$ to $3.6V$ , $I_O = -2mA$		8		
$r_{ON}$	ON-state resistance match between channels	DM_CON, DP_CON, DM_HOST, DP_HOST $V_I = 0.4V$ , $I_O = -2mA$		0.5		
$r_{ON(Flat)}$	ON-state resistance flatness	DM_CON, DP_CON, DM_HOST, DP_HOST $V_I = 0V$ to $3.6V$ , $I_O = -2mA$		1.1		
$I_{IO(OFF)}$	$V_I$ or $V_O$ OFF leakage current	$V_I = 0.3V$ , $V_O = 2.7V$ or $V_I = 2.7V$ , $V_O = 0.3V$ , Switch OFF		45		nA
$I_{IO(ON)}$	$V_O$ ON leakage current	$V_I = OPEN$ , $V_O = 0.3V$ or $2.7V$ , Switch ON		50		nA
<b>DYNAMIC</b>						
$C_{I(OFF)}$	$V_I$ OFF capacitance	DC bias = $0V$ or $3.6V$ , $f = 10MHz$ , Switch OFF		2		pF
$C_{O(OFF)}$	$V_O$ OFF capacitance	DC bias = $0V$ or $3.6V$ , $f = 10MHz$ , Switch OFF		10		pF
$C_{I(ON)}$ , $C_{O(ON)}$	$V_I$ , $V_O$ ON capacitance	DC bias = $0V$ or $3.6V$ , $f = 10MHz$ , Switch ON		11		pF
BW	Bandwidth	$R_L = 50\Omega$ , Switch ON		920		MHz
$O_{ISO}$	OFF Isolation	$f = 240MHz$ , $R_L = 50\Omega$ , Switch OFF		-26		dB
$X_{TALK}$	Crosstalk	$f = 240MHz$ , $R_L = 50\Omega$		-30.5		dB

- (1)  $V_O$  is equal to the asserted voltage on DP\_CON, DM\_CON pins.  
 $V_I$  is equal to the asserted voltage on DP\_HOST and DM\_HOST pins.  
 $I_O$  is equal to the current on the DP\_CON, DM\_CON.  
 $I_I$  is equal to the current on the DP\_HOST and DM\_HOST pins.

## GENERAL OPERATION

The bq24392 is designed to interface a micro/mini USB connector to external peripherals.

The device will automatically detect different types of chargers through the mini/micro USB pin connector. The bq24392 has a high speed USB 2.0 switch that can be automatically opened and closed based on the accessory detected.

## DETECTION SEQUENCE

After accessory insertion, once VBUS voltage is greater than  $V_{BUS\_VALID}$  threshold, the device proceeds onto data contact detection. This state has a 600ms timeout feature specified in BCDv1.2. Depending on the result, the next step is primary detection or non-compatible USB charger detection. In the case of former, the next step is detecting a Standard Downstream Port (SDP), Dedicated Charging Port (DCP), or Charging Downstream Port (CDP). In the case of latter, the next step is detecting an Apple, TomTom, or Non-compliant Charger.

The USB 2.0 switches are automatically closed to enable data transfer if either SDP or CDP is detected and the GOOD\_BAT input is HIGH.

Once a charger has been detected, and if the GOOD\_BAT input is LOW, a Dead Battery timer is initiated. If the GOOD\_BAT continues to be LOW for 30 minutes (maximum of 45 minutes), charging is disabled. Toggling GOOD\_BAT HIGH after DBP timer expires will re-start detection.

The following flow-chart shows the detection sequence used in the bq24392.



## Detection Table

The table below lists the configurations of the DP\_CON (D+) and DM\_CON (D-) that are internal to the various device types.

Device Type	VBUS	DP_CON (D+)	DM_CON (D-)	GOOD_BAT (Input)	CHG_AL_N (Output)	CHG_DET (Output)	SW_OPEN (Output)	Switch Status
Standard Downstream Port	>3.5V	Pull-down R to GND	Pull-down R to GND	HIGH	LOW	LOW	LOW	Connected
				LOW	LOW	LOW	Hi-Z	Not Connected
Charging Downstream Port	>3.5V	Pull-down R to GND	V <sub>DM_SRC</sub>	HIGH	LOW	HIGH	LOW	Connected
				LOW	LOW	HIGH	Hi-Z	Not Connected
Dedicated Charging Port	>3.5V	Short to D-	Short to D+	HIGH	LOW	HIGH	Hi-Z	Not Connected
				LOW	LOW	HIGH	Hi-Z	Not Connected
Apple Charger	>3.5V	2.0 < V <sub>DP</sub> < 2.8	2.0 < V <sub>DM</sub> < 2.8	HIGH	LOW	HIGH	Hi-Z	Not Connected
				LOW	LOW	HIGH	Hi-Z	Not Connected
TomTom Charger	>3.5V	2.0 < V <sub>DP</sub> < 3.1	2.0 < V <sub>DM</sub> < 3.1	HIGH	LOW	HIGH	Hi-Z	Not Connected
				LOW	LOW	HIGH	Hi-Z	Not Connected
PS/2 Charger	>3.5V	Pull-up R to VBUS	Pull-up R to VBUS	X	LOW	LOW	Hi-Z	Not Connected
Non-compliant USB Charger	>3.5V	Open	Open	X	LOW	LOW	Hi-Z	Not Connected
Any Device	<3.5V	Open	Open	X	Hi-Z	LOW	Hi-Z	Not Connected
Any Device DBP Timer Expired	>3.5V	X	X	LOW	Hi-Z	LOW	Hi-Z	Not Connected



## USB 2.0 EYE DIAGRAM

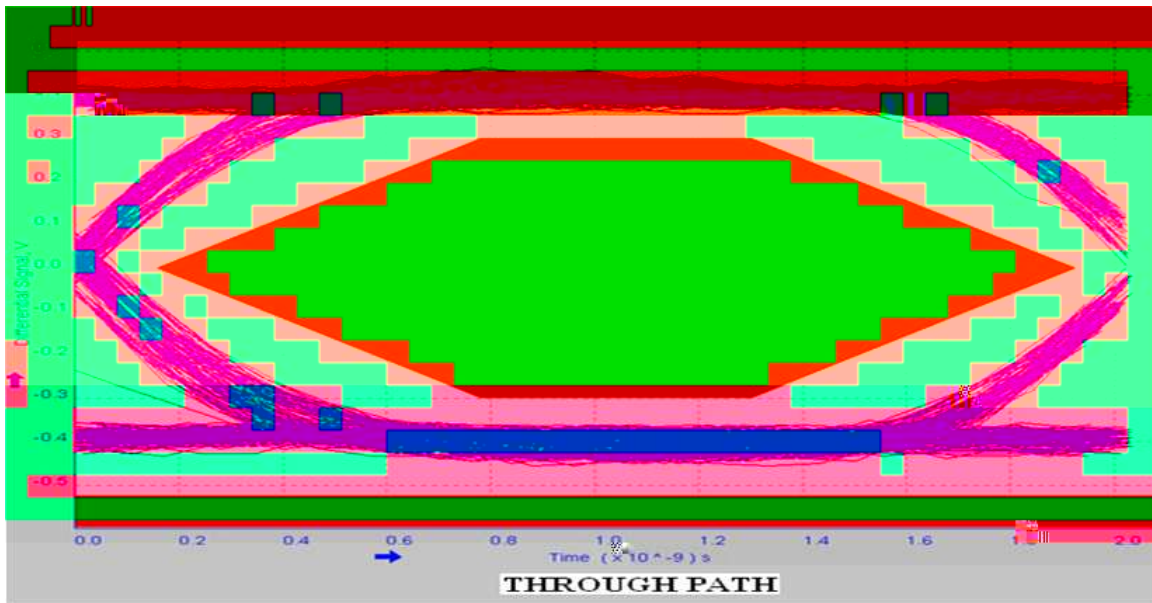


Figure 1. 480-Mbps USB 2.0 Eye Diagram with No Device

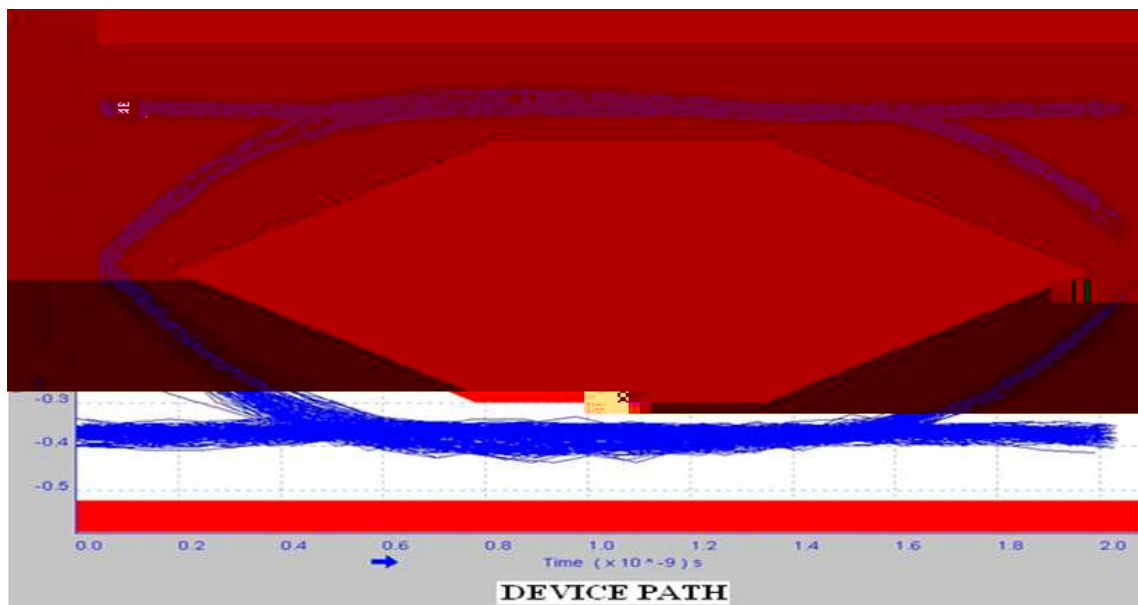


Figure 2. 480-Mbps USB 2.0 Eye Diagram with USB Switch

REFERENCE SCHEMATIC

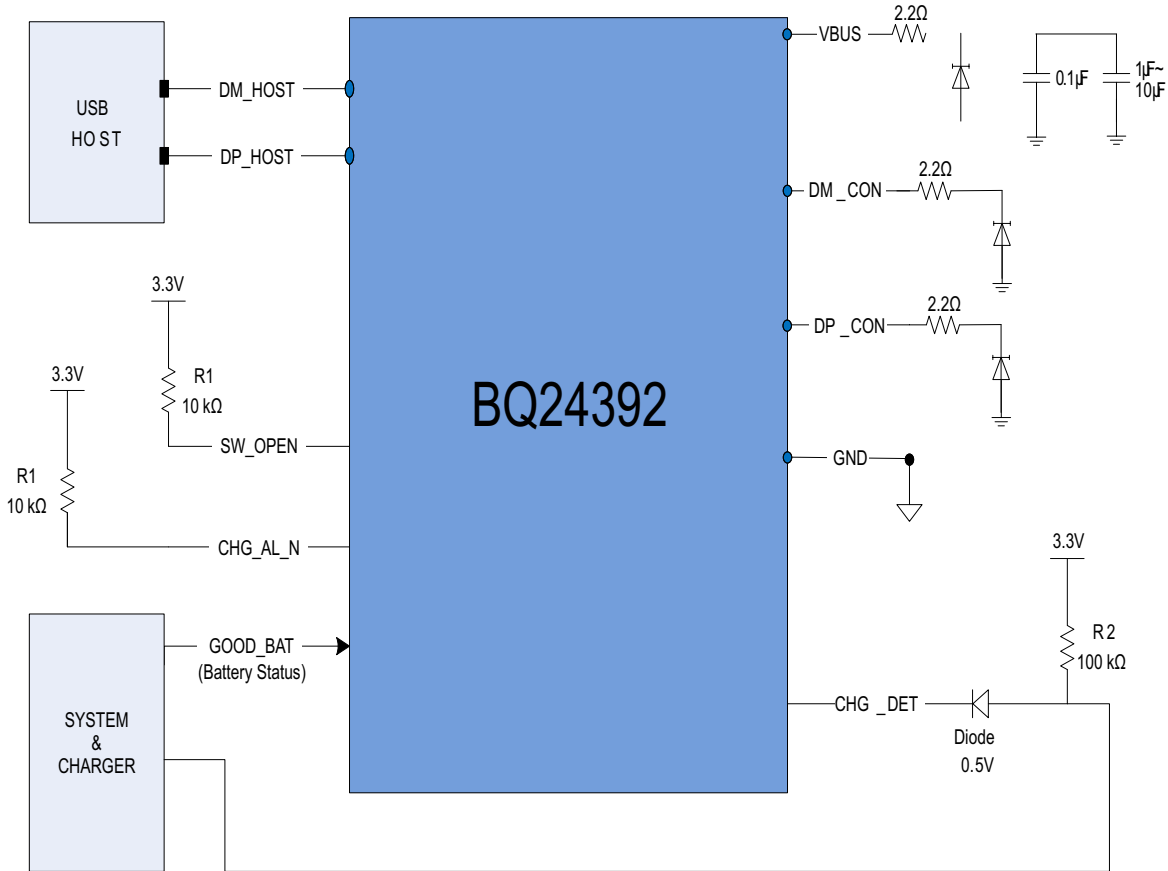


Table 1. Critical Components

PIN		
NAME	NUMBER	CRITICAL COMPONENT
V <sub>BUS</sub>	9	1μF~10μF
		2.2
		ESD Protection Diode
		0.1μF
SW_OPEN	1	10k
CHG_AL_N	4	10k
DM_CON	14	2.2
		ESD Protection Diode
DP_CON	15	2.2
		ESD Protection Diode

### Schematic Guidelines

1.  $V_{BUS}$  requires  $1\mu\text{F}$ ~ $10\mu\text{F}$  and  $0.1\mu\text{F}$  decoupling capacitors to reduce noise from circuit elements. The capacitors act as a shunt to block off the noise. The  $0.1\mu\text{F}$  capacitor smooths out high frequencies and has a lower series inductance. The  $1\mu\text{F}$ ~ $10\mu\text{F}$  capacitor smooths out the lower frequencies and has a much higher series inductance. Using both capacitors will provide better load regulation across the frequency spectrum.
2.  $BUS\_REN$  and  $CHG\_AL\_N$  are open-drain outputs that require a  $10\text{k}\Omega$  pull-up resistor to  $V_{DDIO}$ .
3.  $V_{BUS}$ ,  $DM\_CON$ , and  $DP\_CON$  are recommended to have an external resistor of  $2.2\text{k}\Omega$  to provide extra ballasting to protect the chip and internal circuitry.
4.  $DM\_CON$  and  $DP\_CON$  are recommended to have a  $1\text{pF}$  external ESD Protection Diode rated for  $8\text{kV}$  IEC contact protection to prevent failure in case of an  $8\text{kV}$  IEC contact discharge.
5.  $V_{BUS\_IN}$  is recommended to have a  $1\text{pF}$  ~  $10\text{pF}$  external ESD protection.




[www.ti.com](http://www.ti.com)

## PACKAGE OPTION ADDENDUM

27-Jun-2012

TAPE AND REEL INFORMATION

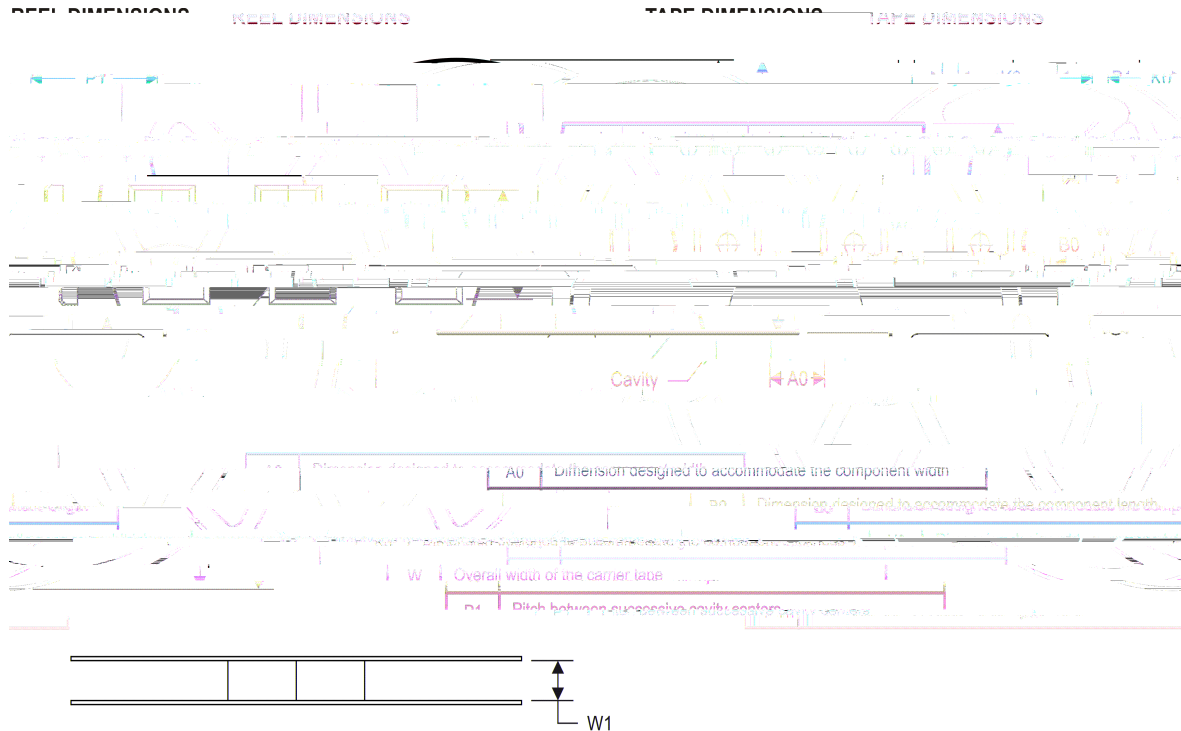


TAPE AND REEL INFORMATION

\*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
BQ24392RSER	UQFN	RSE	10	3000	180.0	8.4	1.68	2.13	0.76	4.0	8.0	Q1

**TAPE AND REEL BOX DIMENSIONS**

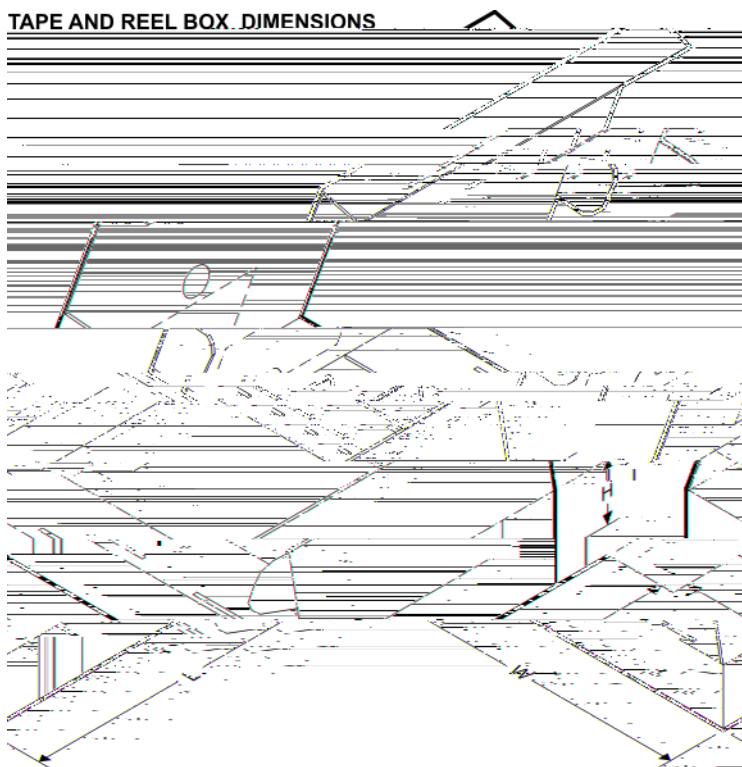

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
BQ24392RSER	UQFN	RSE	10	3000	202.0	201.0	28.0

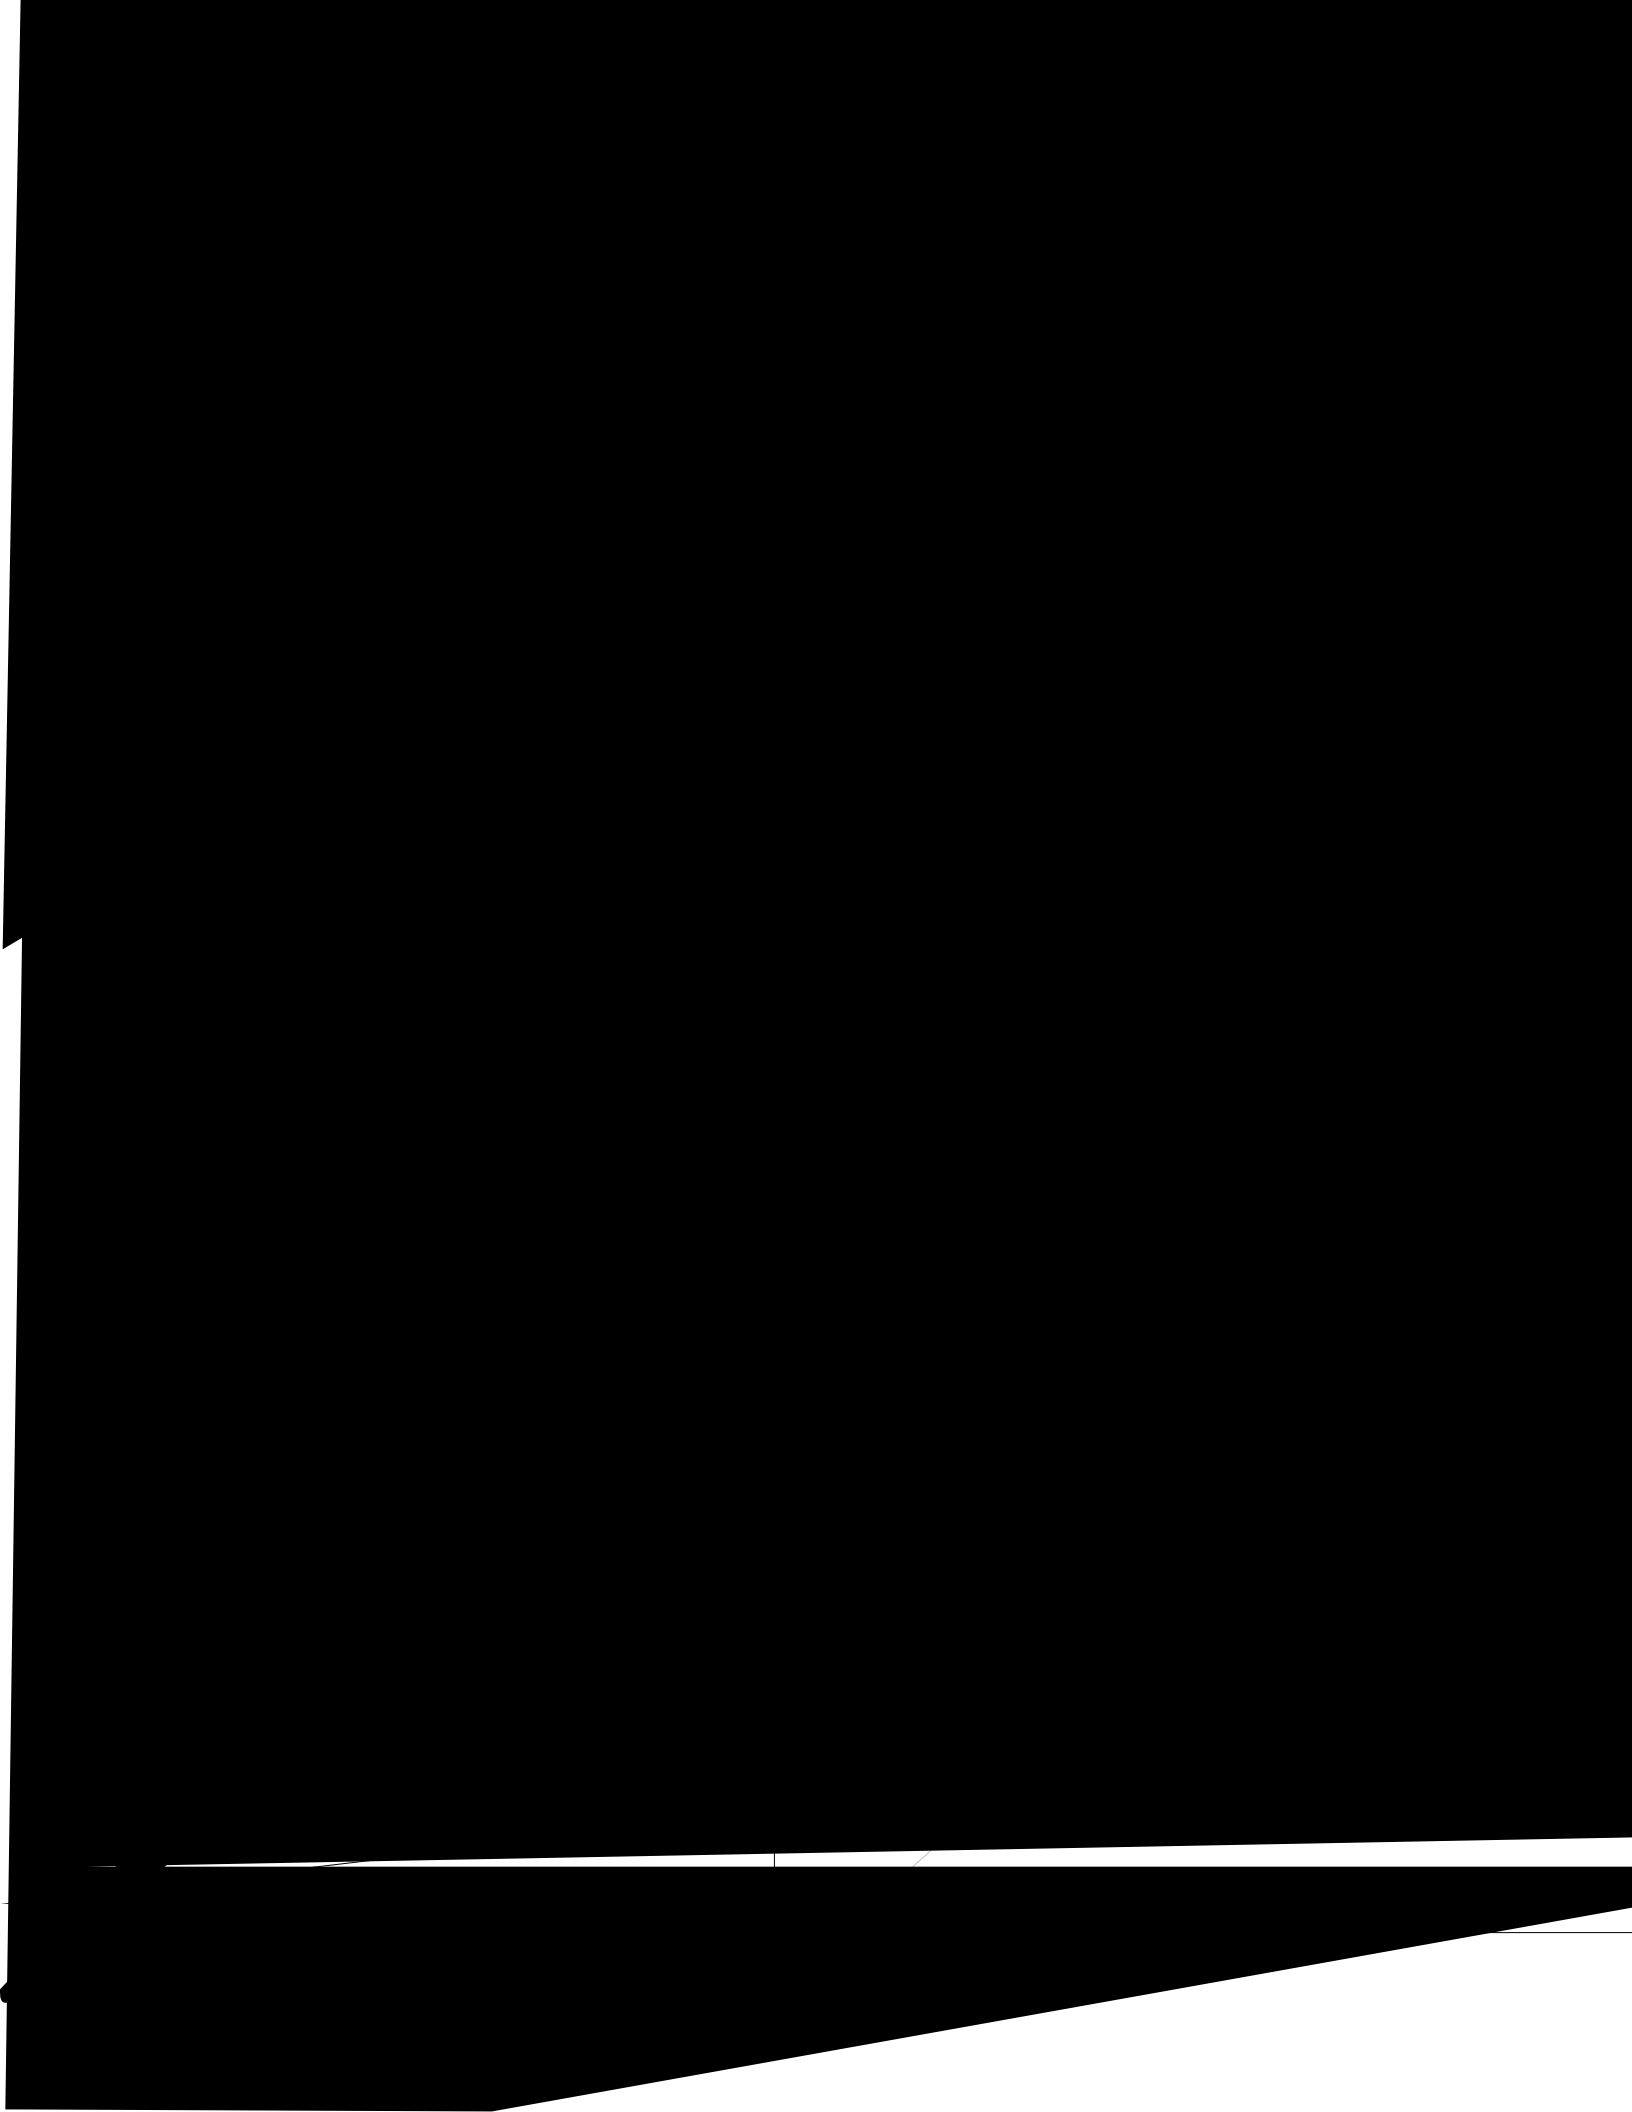





## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.