


Package A



TERMINAL CODE
1 VUPC
2 UFO
3 UP
4 VUP1
5 VVPC
6 VFO
7 VP
8 VVP1
9 NC
10 NC
11 NC
12 NC
13 VNC
14 VN1
15 NC
16 UN
17 VN
18 NC
19 FO

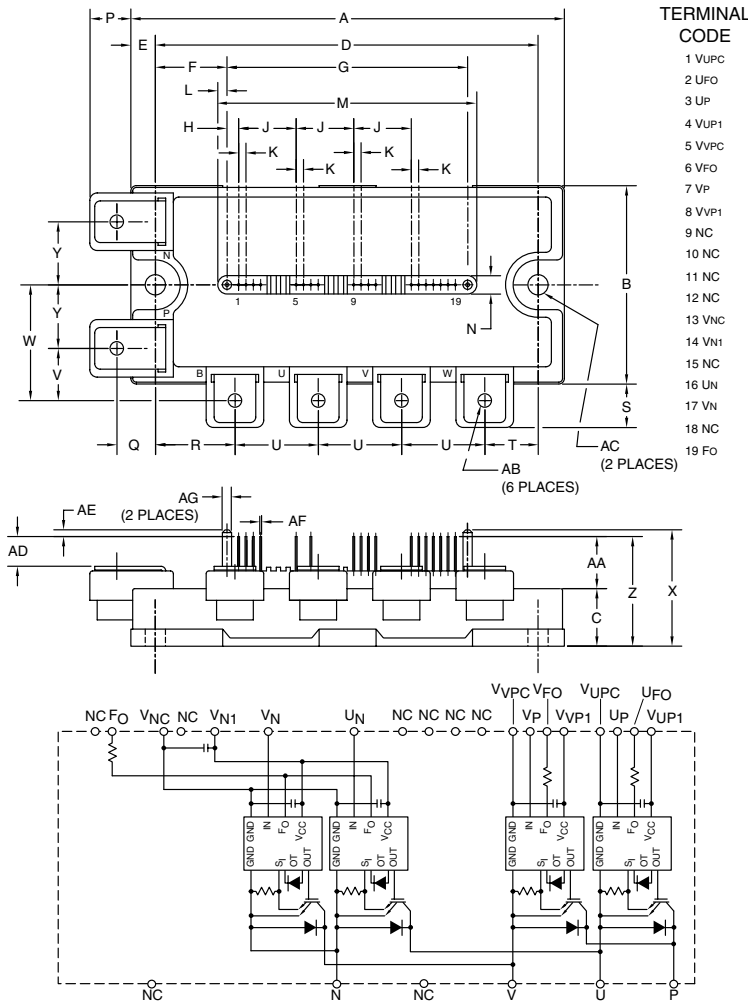

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- PV Inverters
- PV UPS
- PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM50B4LA060 (Package A) is a 600V, 50 Ampere PV-IPM.

Type	Current Rating Amperes	V _{CEs} Volts (x 10)
PM	50	60

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.43	11.0
Q	0.42	10.75
R	0.87	22.0



Dimensions	Inches	Millimeters
S	0.46	11.75
T	0.59	15.0
U	0.91	23.0
V	0.57	14.5
W	1.26	32.0
X	1.22	31.0
Y	0.69	17.5
Z	1.14	29.0
AA	0.51	13.0
AB	M5 Metric	M5
AC	0.22 Dia.	Dia. 5.5
AD	0.28	7.0
AE	0.08	2.0
AF	0.02 Sq.	Sq. 0.5
AG	0.10 Dia.	Dia. 2.5

PM50B4LA060 / PM50B4LB060

Photo Voltaic IPM

H-Bridge

50 Amperes/600 Volts

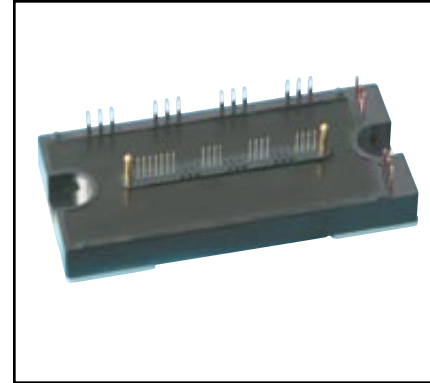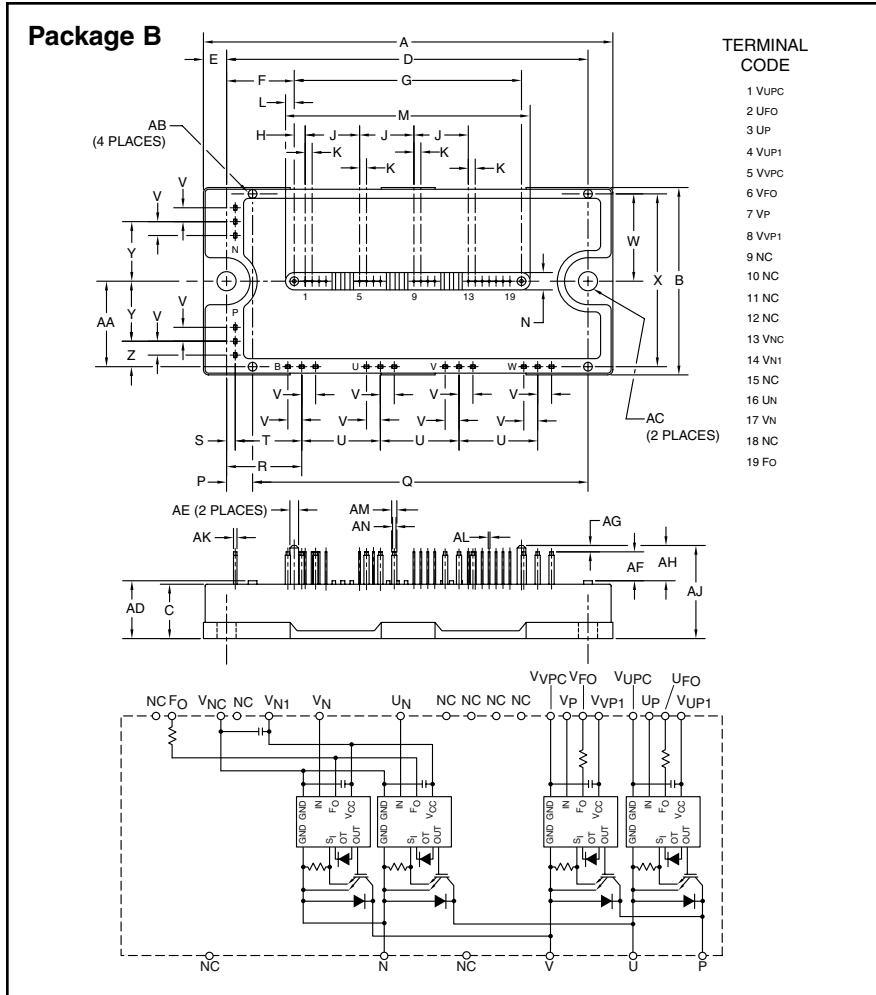

Description:

Powerex Intellimod™ 5th generation PV-IPMs are isolated base modules designed for power switching applications operating at frequencies to 30kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
 - Short Circuit
 - Over Temperature
 - Using On-chip Temperature Sensing
 - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

Applications:

- PV Inverters
- PV UPS
- PV Power Supplies

Ordering Information:

Example: Select the complete part number from the table below -i.e. PM50B4LB060 (Package B) is a 600V, 50 Ampere PV-IPM.

Type	Current Rating Amperes	V _{CEs} Volts (x 10)
PM	50	60

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.31	7.75
Q	3.87	98.25
R	0.87	22.0
S	0.10	2.5
T	0.77	19.5
U	0.91	23.0

Dimensions	Inches	Millimeters
V	0.16	4.0
W	1.01	25.75
X	2.00	50.75
Y	0.69	17.5
Z	0.30	7.5
AA	0.98	25.0
AB	0.10 Dia.	Dia. 2.5
AC	0.22 Dia.	Dia. 5.5
AD	0.67	17.0
AE	0.10 Dia.	Dia. 2.5
AF	0.33	8.5
AG	0.08	2.0
AH	0.41	10.5
AJ	1.08	27.5
AK	0.04	1.0
AL	0.02 Sq.	Sq. 0.5
AM	0.06	1.5
AN	0.04	1.0



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM50B4LA060 / PM50B4LB060

Photo Voltaic IPM

H-Bridge

50 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PM50B4LA060 / PM50B4LB060	Units
Power Device Junction Temperature	T_j	-20 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to 125	$^\circ\text{C}$
Module Case Operating Temperature (Note 1)	T_C	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws (Package A only)	—	31	in-lb
Package A Module Weight (Typical)	—	380	Grams
Package B Module Weight (Typical)	—	340	Grams
Supply Voltage, Surge (Applied between P-N)	$V_{\text{CC(surge)}}$	550	Volts
Operation of Short Circuit Protections (Applied between P-N, $V_D = 13.5 \sim 16.5\text{V}$, Inverter Part, $T_j = 125^\circ\text{C}$ Start)	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	V_{ISO}	2500	Volts

IGBT Inverter Part

Collector-Emitter Voltage ($V_D = 15\text{V}$, $V_{\text{CIN}} = 15\text{V}$)	V_{CES}	600	Volts
Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_C$	50	Amperes
Peak Collector Current ($T_C = 25^\circ\text{C}$)	$\pm I_{\text{CP}}$	100	Amperes
Collector Dissipation ($T_C = 25^\circ\text{C}$) (Note 1)	P_C	131	Watts

Control Part

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$, $V_{\text{VP1}}-V_{\text{VPC}}$, $V_{\text{N1}}-V_{\text{NC}}$)	V_D	20	Volts
Input Voltage (Applied between U_P-V_{UPC} , V_P-V_{VPC} , $U_N-V_N-W_N-Br-V_{\text{NC}}$)	V_{CIN}	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$, $V_{\text{FO}}-V_{\text{VPC}}$, F_O-V_{NC})	V_{FO}	20	Volts
Fault Output Supply Current (Sink Current at U_{FO} , V_{FO} , F_O Terminals)	I_{FO}	20	mA

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Collector-Emitter Saturation Voltage	$V_{\text{CE(sat)}}$	$V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 50\text{A}$, Pulsed, $T_j = 25^\circ\text{C}$	—	1.5	—	Volts
		$V_D = 15\text{V}$, $V_{\text{CIN}} = 0\text{V}$, $I_C = 50\text{A}$, Pulsed, $T_j = 125^\circ\text{C}$	—	1.55	—	Volts
Diode Forward Voltage	V_{EC}	$-I_C = 50\text{A}$, $V_{\text{CIN}} = 15\text{V}$, $V_D = 15\text{V}$	—	2.2	3.3	Volts
Inductive Load Switching Times	t_{on}		0.3	0.7	1.4	μs
	t_{rr}	$V_D = 15\text{V}$, $V_{\text{CIN}} = 0 \leftrightarrow 15\text{V}$	—	0.1	0.2	μs
	$t_{\text{C(on)}}$	$V_{\text{CC}} = 300\text{V}$, $T_j = 125^\circ\text{C}$	—	0.2	0.4	μs
	t_{off}	Inductive Load (Per 1 Arm)	—	0.9	1.8	μs
	$t_{\text{C(off)}}$		—	0.2	0.4	μs
Collector-Emitter Cutoff Current	I_{CES}	$V_{\text{CE}} = V_{\text{CES}}$, $V_{\text{CIN}} = 15\text{V}$, $T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{\text{CE}} = V_{\text{CES}}$, $V_{\text{CIN}} = 15\text{V}$, $T_j = 125^\circ\text{C}$	—	—	10	mA



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PM50B4LA060 / PM50B4LB060

Photo Voltaic IPM

H-Bridge

50 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Control Part						
Control Supply Voltage	V_D	Applied between $V_{UP1}-V_{UPC}, V_{VP1}-V_{VPC}, V_{N1}-V_N$	13.5	15.0	16.5	Volts
Circuit Current	I_D	$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$	—	20	30	mA
		$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{XP1}-V_{XPC}$	—	5	10	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between U_P-V_{UPC} ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, U_N- V_N- W_N-Br-V_{NC}$	1.7	2.0	2.3	Volts
Short Circuit Trip Level	SC	Inverter Part	100	—	—	Amperes
($-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15\text{V}$, Inductive Load per 1 Arm)		Brake Part	100	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	$V_D = 15\text{V}$	—	10	—	μs
Over Temperature Protection*	OT	Trip Level	135	145	—	$^\circ\text{C}$
($V_D = 15\text{V}$)	OT_r	Reset Level	—	125	—	$^\circ\text{C}$
Supply Circuit Under-voltage Protection	UV	Trip Level	11.5	12.0	12.5	Volts
($T_j \leq 125^\circ\text{C}$)	UV_r	Reset Level	12.0	12.5	13.0	Volts
Fault Output Current*	$I_{FO(H)}$	$V_D = 15\text{V}, V_{FO} = 15\text{V}$	—	—	0.01	mA
	$I_{FO(L)}$	$V_D = 15\text{V}, V_{FO} = 15\text{V}$	—	10	15	mA
Fault Output Pulse Width*	t_{FO}	$V_D = 15\text{V}$	1.0	1.8	—	ms

*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it. Fault output of SC protection given pulse. Fault output of OT, UV protection given pulse while over trip level.

Thermal Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Inverter IGBT (Per 1 Element) (Note 1)	—	—	0.95	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1 Element) (Note 1)	—	—	1.61	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin (Per 1 Element), Thermal Grease Applied	—	—	0.038	$^\circ\text{C/Watt}$

Recommended Conditions for Use










Characteristic	Symbol	Condition	Value	Units
Supply Voltage	V_{CC}	Applied across P-N Terminals	≤ 400	Volts
Control Supply Voltage	V_D	Applied between $V_{UP1}-V_{UPC},$ $V_{VP1}-V_{VPC}, V_{N1}-V_{NC}$	15.0 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between $U_P-V_{UPC},$	≤ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$V_P-V_{VPC}, U_N- V_N- W_N-Br-V_{NC}$	≥ 9.0	Volts
PWM Input Frequency	f_{PWM}	Using Application Circuit	≤ 30	kHz
Arm Shoot-through Blocking Time	t_{DEAD}	Using Application Circuit of IPM's Input Signal of Each Arm	≥ 2.0	μs

PM50B4LA060 / PM50B4LB060

Photo Voltaic IPM

H-Bridge

50 Amperes/600 Volts

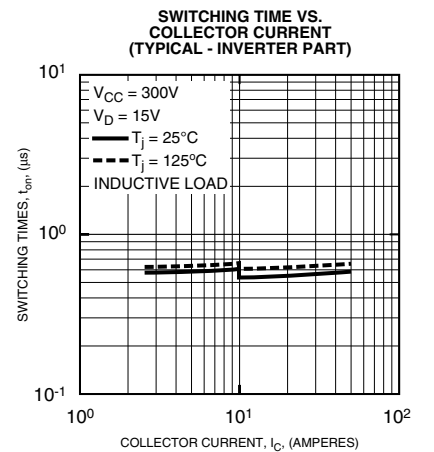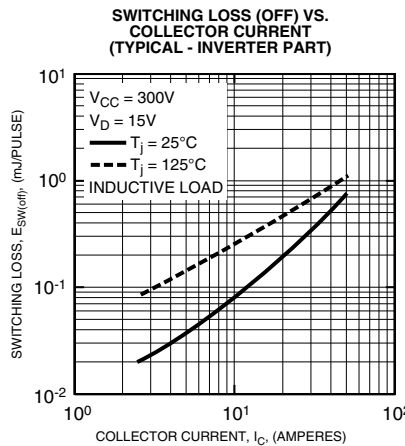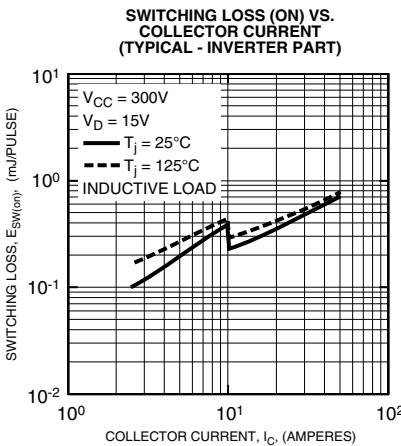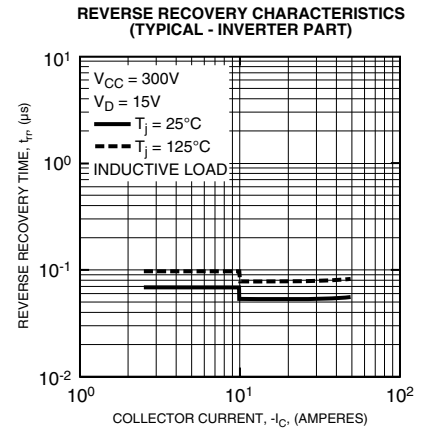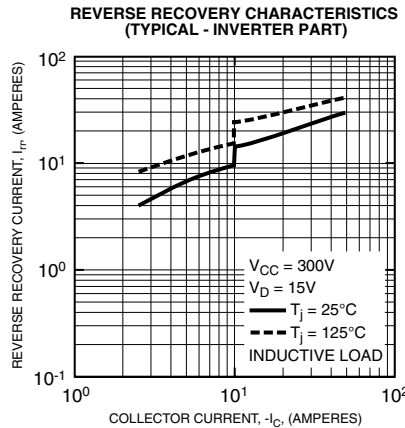
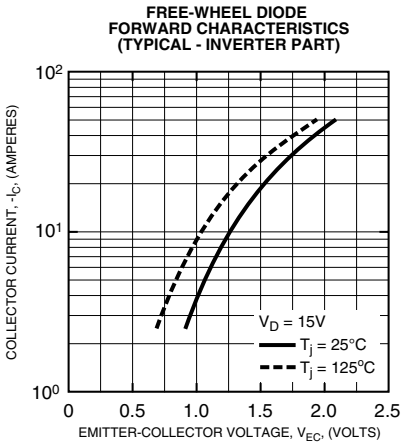
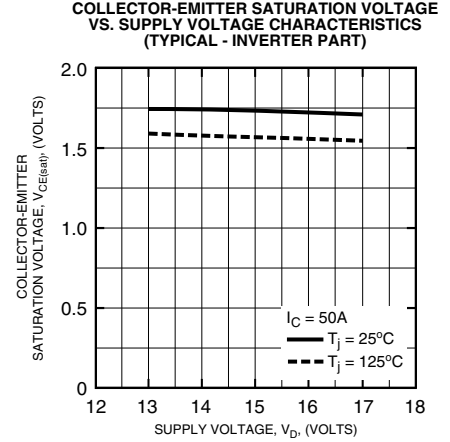
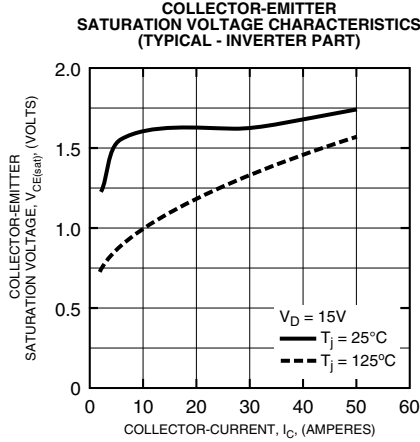
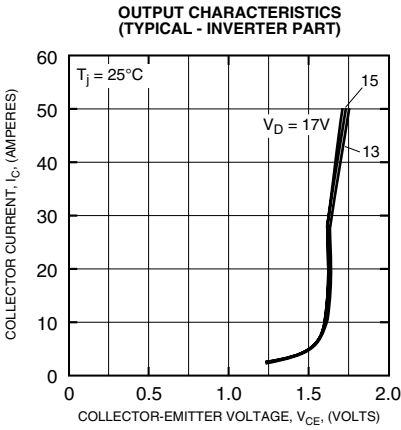


PM50B4LA060 / PM50B4LB060

Photo Voltaic IPM


H-Bridge

50 Amperes/600 Volts

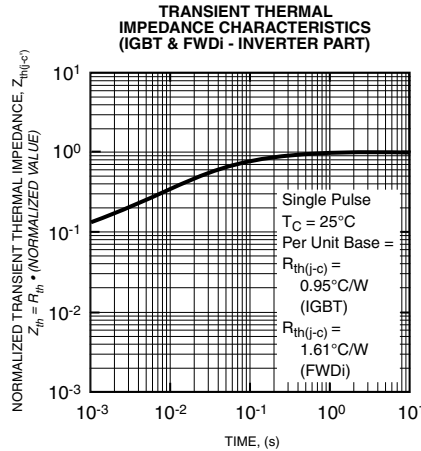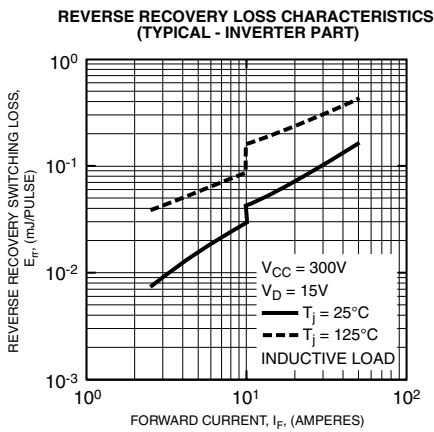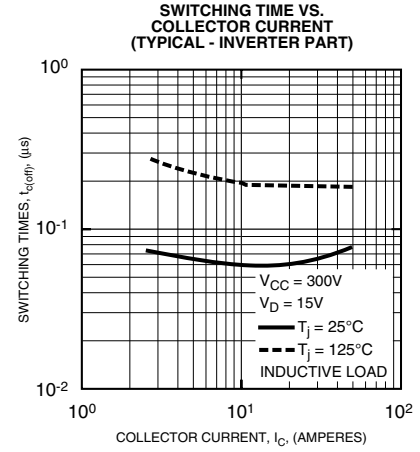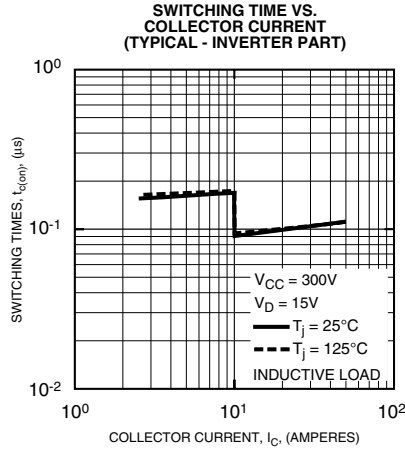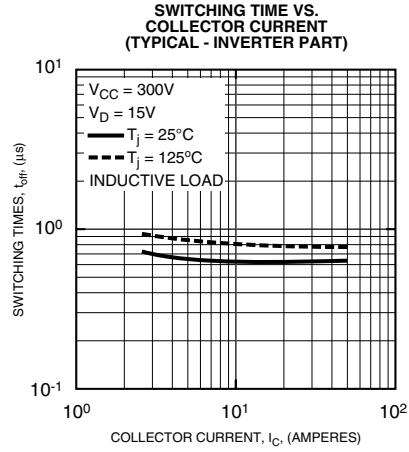

Note 1: T_C (under the chip) Measurement Point

Package A

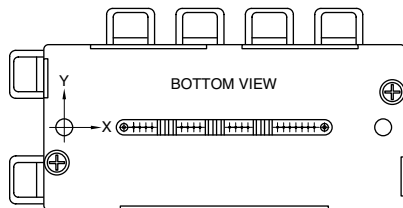

Package B

