
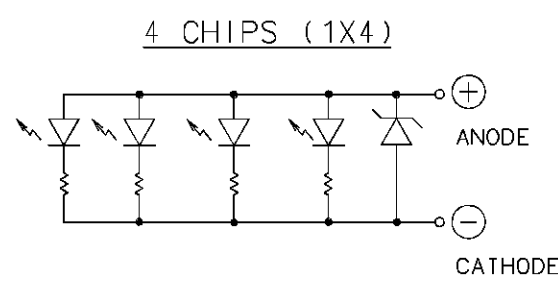
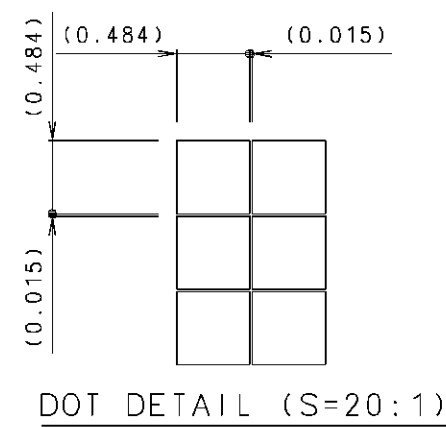


VIEWING DIRECTION

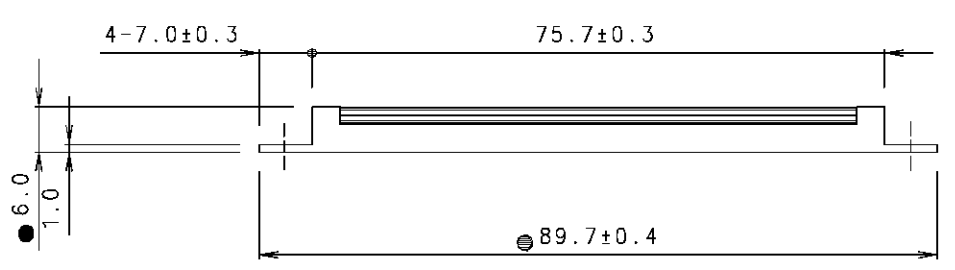

CN2 PIN ASSIGNMENT

| No. | SYMBOL         |
|-----|----------------|
| 1   | LED A          |
| 2   | LED K(CATHODE) |

CN1 PIN ASSIGNMENT

| No. | SYMBOL | No. | SYMBOL | No. | SYMBOL |
|-----|--------|-----|--------|-----|--------|
| 1   | /CS1   | 11  | D5     | 21  | C2-    |
| 2   | /RES   | 12  | D6     | 22  | V1     |
| 3   | A0     | 13  | D7     | 23  | V2     |
| 4   | /WR    | 14  | VDD    | 24  | V3     |
| 5   | /RD    | 15  | VSS    | 25  | V4     |
| 6   | D0     | 16  | VOUT   | 26  | V0     |
| 7   | D1     | 17  | C3+    | 27  | VR     |
| 8   | D2     | 18  | C1-    | 28  | C86    |
| 9   | D3     | 19  | C1+    | 29  | P/S    |
| 10  | D4     | 20  | C2+    | 30  | IRS    |

TOLERANCE

| MEASURE   | A    | B    | C    |
|-----------|------|------|------|
| L≤16      | ±0.1 | ±0.3 | ±1   |
| 16<L≤63   | ±0.2 | ±0.5 | ±1.5 |
| 63<L≤250  | ±0.3 | ±0.8 | ±2   |
| 250<L≤500 | ±0.5 | ±1.2 | ±3   |
| 500<L     | ±0.8 | ±2   | ±4   |
| ANGLE     | ±1°  | ±5°  | ±10° |

NOTE

1. THE DIMENSION WITH THE MARK (●) ARE CONTROLLED AS A PARTICULAR CHARACTERISTIC.
2. [Hatched Area] SHOWS MAX AREA OF SILICONE RESIN.
3. VIEWING DIRECTION: DIRECTION THAT YOU CAN SEE THE DISPLAY MOST CLEARLY.
4. DISPLAY SKEW |a-b| ≤ 0.5
5. DO NOT USE MATERIALS WHICH ARE PROHIBITED BY ROHS.

MATERIAL: FINISH:

|                             |                        |                                |         |
|-----------------------------|------------------------|--------------------------------|---------|
| DATE<br>2008/10/13          | THIRD ANGLE PROJECTION | OPTREX CORPORATION             |         |
| APPROVED<br>Tokihito Sawada | SCALE UNIT<br>1:1 mm   |                                |         |
| CHECKED<br>Masami Motohashi | DATE Oct,7'08          | DWG NO.(CODE)<br>F-55472AABASE |         |
| DRAWN<br>Shun Li            | DSGN<br>Shun Li        | DWG SIZE<br>A3                 | DWG REV |