




4302T-5VLC Sub Miniature 1.65mm Integrated Resistor-5 Volt Low Current

DESCRIPTION AND FEATURES

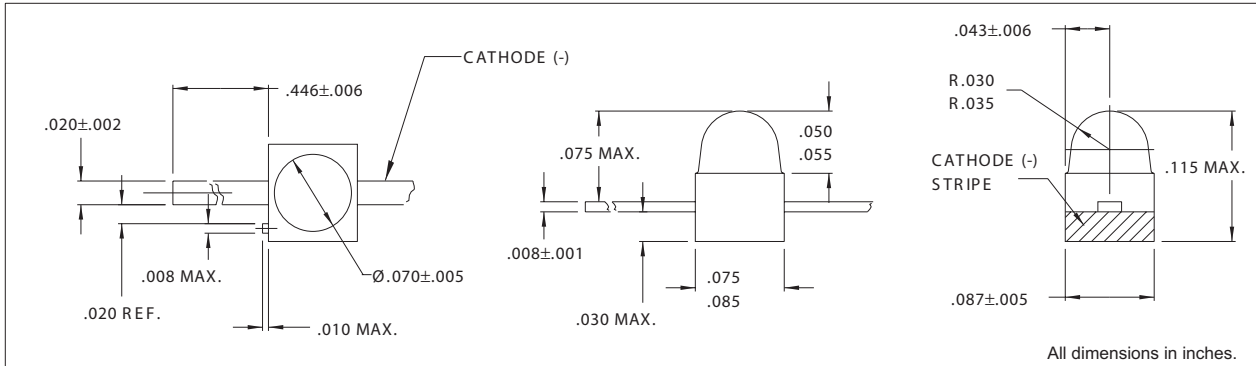

Sub-Miniature High Brite LED

- Integral current limiting resistor requires no external resistor with 5 volt supply.
- Space saving sub-miniature package.
- TTL and LSTTL compatible.
- Wide viewing angle.
- High efficiency red and amber use GaAsP on GaP.

ELECTRO-OPTICAL CHARACTERISTICS AND RATINGS

PART NUMBER	4302T1-5VLC	4302T3-5VLC	4302T5-5VLC
Output Color	Red	Amber	Green
Diffusion	Diffused	Diffused	Diffused
Package Color	Red	Amber	Green
Rated Current (mA)	4	4	4
Forward Voltage Typ. (V)	5	5	5
Forward Voltage Max. (V)	6	6	6
Luminous Intensity Min. (mcd)	0.8	0.9	0.9
Luminous Intensity Typ. (mcd)	2.0	4.0	2.0
Peak Wavelength (nm)	635	583	565
Viewing Angle 2θ 1/2 (degrees)	90	90	90
Continuous Forward Current Max. (mA)	5	5	5
Reverse Breakdown Voltage Min. (V)	5	5	5
Forward Current @ Vf=5V Typ.	3.5	3.5	3.5
Forward Current @ Vf=5V Typ.	5	5	5

147 Central Avenue
 Hackensack, NJ 07601
 Phone: (201) 489-8989
 Fax: (201) 489-6911

18703 Dix Toledo Road
 Brownstown, MI 48193

Saret Zone Franca, Edificio B
 Alajuela Costa Rica

E-mail: sales@chml.com • Web Site: www.chml.com