



**NEC's 1550 nm InGaAsP
MQW-DFB TOSA FOR LONG HAUL
2.5 Gb/s APPLICATIONS**

NX8511UD

FEATURES

- **PEAK EMISSION WAVELENGTH:**
 $\lambda_p = 1\ 550\ \text{nm}$
- **OPTICAL OUTPUT POWER:**
 $P_f = 2.0\ \text{mW}$
- **WIDE OPERATING TEMPERATURE RANGE:**
 $T_c = -20\ \text{to}\ +85^\circ\text{C}$
- **SIDE MODE SUPPRESSION RATIO:**
 $\text{SMSR} = 40\ \text{dB}$
- **INGAAS MONITOR PIN-PD**
- **INTERNAL OPTICAL ISOLATOR**
- **BASED ON TELCORDIA RELIABILITY**




DESCRIPTION

NEC's NX8511UD is a 1 550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode TOSA (transmitter optical sub-assembly) with InGaAs monitor PIN-PD in a receptacle type package designed for SFF/SFP transceiver with LC duplex receptacle.

This device is ideal for Synchronous Digital Hierarchy (SDH) system, long haul STM-16 (L-16.2), ITU-T recommendations, and SONET OC-48 (LR-2).

PACKAGE DIMENSIONS (UNIT : mm)

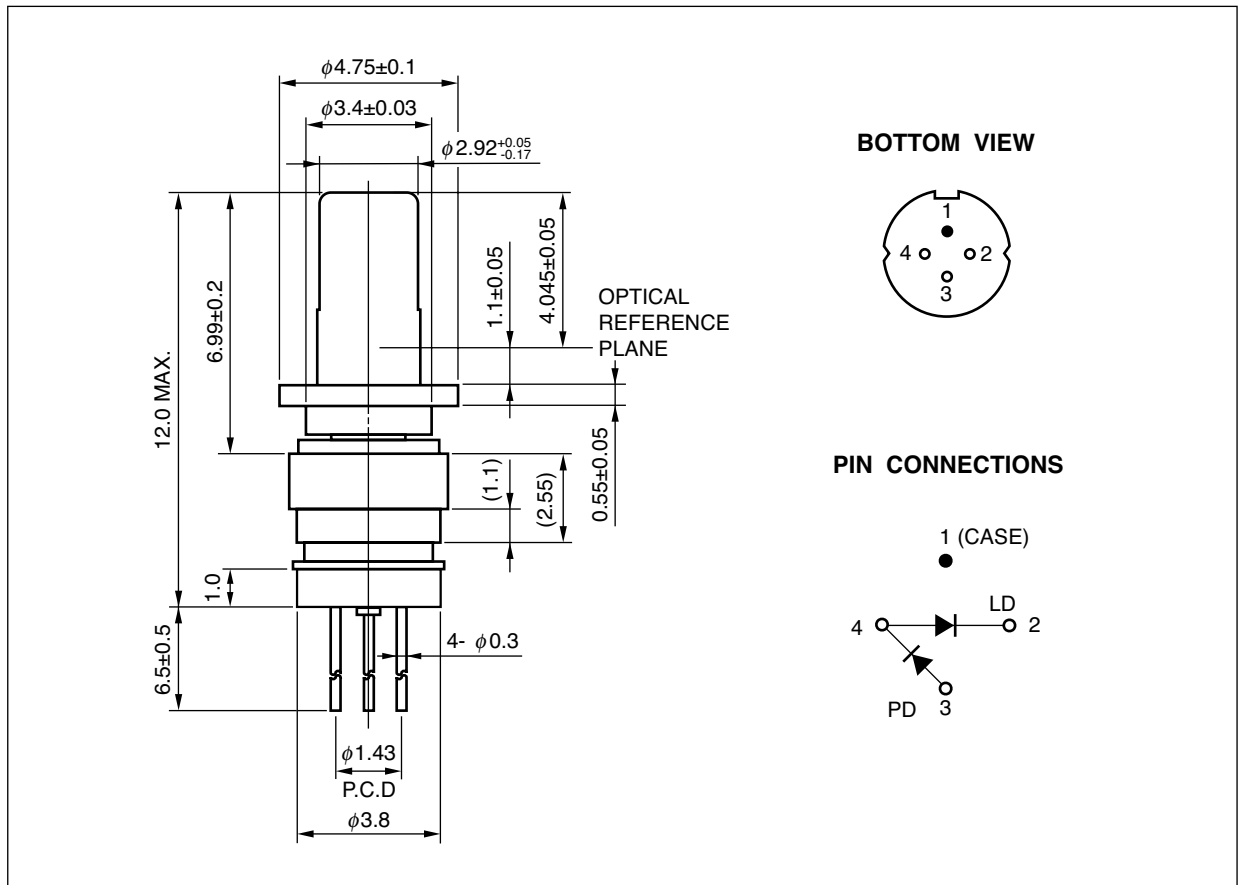

ORDERING INFORMATION

PART NUMBER	PACKAGE	PIN CONNECTIONS
NX8511UD-AZ*	ϕ 3.8 mm TOSA	

***NOTE:**

Please refer to the last page of this data sheet, "Compliance with EU Directives" for Pb-Free RoHS Compliance Information.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Optical Output Power from Fiber	P_f	5.0	mW
Forward Current of LD	I_F	150	mA
Reverse Voltage of LD	V_R	2.0	V
Forward Current of PD	I_F	2.0	mA
Reverse Voltage of PD	V_R	15	V
Operating Case Temperature	T_c	-20 to +85	°C
Storage Temperature	T_{stg}	-40 to +85	°C
Lead Soldering Temperature	T_{sld}	350 (3 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

ELECTRO-OPTICAL CHARACTERISTICS ($T_c = -20$ to $+85^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Optical Output Power from Fiber	P_f	CW		2.0		mW
Operating Voltage	V_{op}	$P_f = 2.0$ mW		1.1	1.6	V
Threshold Current	I_{th}	$T_c = 25^\circ\text{C}$		10	20	mA
					50	
Threshold Output Power	P_{th}	$I_F = I_{th}$			100	μW
Differential Efficiency	η_d	$P_f = 2.0$ mW, $T_c = 25^\circ\text{C}$	0.07	0.1		W/A
		$P_f = 2.0$ mW	0.04			
Peak Emission Wavelength	λ_p	CW, $P_f = 2.0$ mW	1 530	1 550	1 570	nm
Side Mode Suppression Ratio	SMSR	$P_f = 2.0$ mW	30	40		dB
Rise Time	t_r	20-80%, $P_{pk} = 2.0$ mW, $I_F = I_{th}$			100	ps
Fall Time	t_f	80-20%, $P_{pk} = 2.0$ mW, $I_F = I_{th}$			150	ps
Monitor Current	I_m	$V_R = 1.5$ V, $P_f = 1.0$ mW	100	500	1 000	μA
Monitor Dark Current	I_d	$V_R = 1.5$ V, $T_c = 25^\circ\text{C}$		0.1	50	nA
		$V_R = 1.5$ V		10	500	
Tracking Error	γ	$I_m = \text{const.}$	-1.0		1.0	dB
Connector Repeatability	-	With master pigtail	-1.0		1.0	dB

Life Support Applications

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

CEL California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • www.cel.com

DATA SUBJECT TO CHANGE WITHOUT NOTICE

05/03/2004

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices	
		-A	-AZ
Lead (Pb)	< 1000 PPM	Not Detected	(*)
Mercury	< 1000 PPM	Not Detected	
Cadmium	< 100 PPM	Not Detected	
Hexavalent Chromium	< 1000 PPM	Not Detected	
PBB	< 1000 PPM	Not Detected	
PBDE	< 1000 PPM	Not Detected	

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

Important Information and Disclaimer: Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.